

PRODUCT PROFILE

High Quality Product

**Valves, PICVs, Strainers,
Flexible Connectors and Pipe
Accessories**



**Specialist In Chilled Water and Water
Systems Valves & Accessories**

KIDS PIPE ACCESSORIES LLC

#44, Sveti Kniaz Boris I St., 5100 Gorna Oryahovitza - Bulgaria

Tel: +359 618 8 7777

Email: info@kidsvalves.com | Website: www.kidsvalves.com



KIDS

KIDS Established in 2007 as well established manufacturer of valves and pipe fittings for applications in building services and industries related to chilled water systems, potable water, other water distribution systems and crude oil, ...etc.

The **KIDS** Brand is synonymous with quality, reliability and service to the highest standard, and has industry experiences in many sectors including heating and ventilation, chemicals, and water system.

KIDS can supply a skillfully engineered solutions for every application. Flagship products include a full range of commissioning valves suitable for static and dynamic flow systems.



QUALITY ASSURANCE

Quality control and inspections at all the stages of manufacture to ensure that **KIDS PA's** Products are manufactured with the related standards and to assure their suitability to use for the intended application and will provide the best reliable service.

All **KIDS** Products are manufactured under **ISO9001:2015** Certificate. In addition, the products has been certified and/or listed by third party organizations such as **ICIM-Italy**, **RTM Breda – Italy**, and **Water Regulations Advisory Scheme (WRAS) in United Kingdom**.

Our range of valves and accessories are available from **DN15 to DN2000** (depends on valve type and application), the material of construction for the products are in cast iron, ductile iron, carbon steel, stainless steel, bronze, DZR Brass, Brass....., etc., in a variety of alloys, trims, configuration, pressure classifications (**PN16, PN20, and PN25**), other higher pressure rating are available upon request.

KIDS Products are engineered and manufactured to stringent internationally approved and recognized accreditations. All valves are manufactured in accordance to the relevant **British and Europe Standards (BS and EN)**. **KIDS** is also provide specific range of valves for public health usage, these products are certified by **WRAS-UK** and **RTM Breda-Italy**.

Our priority and emphasis is on quality and efficiency of our products. To this end all our products undergo individual and rigorous testing in accordance with its relevant product standard.



PRESSURE INDEPENDENT CONTROL VALVES - PICV


Pressure Independent Control Valve

The KIDS Pressure Independent Control Valve (PICV) is a combination of constant flow limiter and full stroke, full authority linear / equal percentage temperature control valve. KIDS PICVs are suitable to use in variable and constant temperature systems.

Operating principles

KIDS PICV is made up of three main parts:

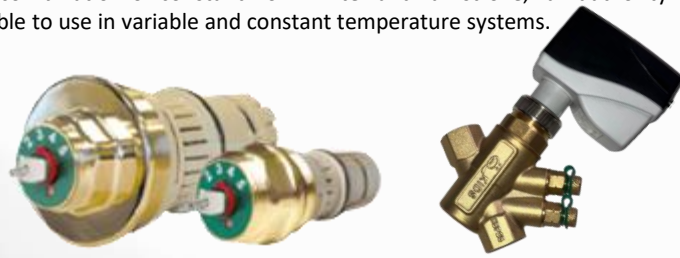


1. Differential pressure regulator
2. Regulating valve for flow adjustment
3. Flow pre-setting knob



Differential pressure regulator

The differential pressure regulator is the heart of the pressure independent control valve. By keeping a constant differential pressure across the valve seats constant flow and full authority temperature control can be achieved.

Incoming pressure is transmitted to the top face of the diaphragm, outgoing pressure is transmitted to the underside of this same diaphragm. A constant effective differential pressure is maintained. As the incoming pressure increases relative to outgoing pressure it acts on the diaphragm closing the shutter against a seat thereby lowering the effective differential pressure. As the incoming pressure decreases relative to outgoing pressure the diaphragm acts to open the shutter from the seat thus increasing the effective differential pressure. The diaphragm acts against a spring in order to balance the pressure control and stop the diaphragm oscillating.

			
FIG. KFCUL25 PN25 FCU VALVE KIT WITH PICV BRASS	FIG. KBP25 PN25 PRESSURE INDEPENDENT CONTROL VALVE BRASS	FIG. KBP16 PN16 PRESSURE INDEPENDENT CONTROL VALVE BRASS	FIG. KIP16 PN16 PRESSURE INDEPENDENT CONTROL VALVE DUCTILE IRON
PN Rating: PN25 Temp. Range: 0°C to 100°C Size DN15 TO DN25	PN Rating: PN25 Temp. Range: 0°C to 120°C Size DN15 TO DN25 ISO7-1 Threaded Ends	PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN32 TO DN50 ISO7-1 Threaded Ends	PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN300 ISO7005-2 Flanged Ends
			
THERMAL ACTUATOR ON / OFF TYPE 230V AC, 50Hz IP54	THERMAL ACTUATOR MODULATING TYPE 24V AC/DC, 50Hz, IP54 0-10V DC CONTROL SIGNAL	MOTOR DRIVEN ACTUATOR STANDARD MODULATING TYPE 24V AC/DC, 50/60Hz, IP54 0(2)-10V DC CONTROL SIGNAL	MOTOR DRIVEN ACTUATOR MODULATING TYPE 24V AC/DC, 50Hz, IP54 0-10V DC CONTROL SIGNAL
Stroke Size: 5mm Torque: 100N Average Actuation: 30s/mm Type: Normally Close	Stroke Size: 5mm Torque: 100N Average Actuation: 30s/mm Type: Normally Close	Stroke: 5.8mm Actuating Force: 160N -10N/+70N Operation Time: 22s/mm Type: Electrical, Bi-directional synchronous motor	Stroke Size: 30mm / 50mm Torque: 500N/1000N/3000N Average Actuation: 1s/mm LED indicator, Feedback Signal





BRONZE AND BRASS VALVES

			
<p>FIG. KBG20 PN20 GATE VALVE BRONZE</p>	<p>FIG. KBG20LS PN20 GATE VALVE BRONZE</p>	<p>FIG. KBL25 PN25 FULL PORT BALL VALVE BRONZE</p>	<p>FIG. KFDRV25 PN25 BRONZE FIXED ORIFICE DOUBLE REGULATING VALVE</p>
<p>PN Rating: PN20 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>	<p>PN Rating: PN20 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>	<p>PN Rating: PN25 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>	<p>PN Rating: PN25 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>
			
<p>FIG. KBCK20 PN20 SWING CHECK VALVE BRONZE</p>	<p>FIG. KBS25 PN25 'Y' PATTERN STRAINER BRONZE</p>	<p>FIG. KBS20 PN20 'Y' PATTERN STRAINER BRONZE</p>	<p>FIG. KBPRV20 PN20 PRESSURE REDUCING VALVE - BRONZE</p>
<p>PN Rating: PN20 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>	<p>PN Rating: PN25 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>	<p>PN Rating: PN20 Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends</p>	<p>PN Rating: PN20 Temp. Range: 0°C to 70°C Size ½" to 2" BS21 Threaded Ends</p>
			
<p>FIG. KDC PN16 DRAIN COCK DZR BRASS</p>	<p>FIG. KAV PN10 AUTOMATIC AIR VENT BRASS</p>	<p>FIG. KTP PN25 P/T TEST POINTS DZR BRASS</p>	<p>FIG. KHB PN10 HOSE BIB TAP BRASS</p>
<p>PN Rating: PN16 Temp. Range: 0°C to 100°C Size ½" to 1" BS21 Threaded Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 100°C Size ½" to 1" BS21 Threaded Ends</p>	<p>PN Rating: PN25 Temp. Range: 0°C to 100°C Size ½" (8mm) BS21 Threaded Ends</p>	<p>PN Rating: PN10 Temp. Range: 0°C to 70°C Size ½" to 1" BS21 Threaded Ends</p>

CAST & DUCTILE IRON VALVES

			
<p>FIG. KIG16 PN16 GATE VALVE – METAL SEAT DUCTILE IRON</p>	<p>FIG. KIRIG16 PN16 GATE VALVE – RESILIENT SEAT DUCTILE IRON</p>	<p>FIG. KIG16RS PN16 GATE VALVE – OS&Y DUCTILE IRON</p>	<p>FIG. KIDRV16FO PN16 DUCTILE IRON FIXED ORIFICE DOUBLE REGULATING VALVE</p>
<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN300 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN300 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN300 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN300 BS EN1092-2 PN16 Flanged Ends</p>
			
<p>FIG. KBFV16L PN16 FULLY LUG BUTTERFLY VALVE DUCTILE IRON</p>	<p>FIG. KBFV16LG PN16 FULLY LUG BUTTERFLY VALVE DUCTILE IRON</p>	<p>FIG. KBFV16W PN16 SEMI LUG BUTTERFLY VALVE DUCTILE IRON</p>	<p>FIG. KBFV16WG PN16 SEMI LUG BUTTERFLY VALVE DUCTILE IRON</p>
<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN200 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN250 TO DN600 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN200 TO SUITE BS EN1092-2 FLANGES</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN250 TO DN600 TO SUITE BS EN1092-2 FLANGES</p>
			
<p>FIG. KIDDCK16 PN16 WAFER CHECK VALVE-NRV DUCTILE IRON</p>	<p>FIG. KISCK16 PN16 SWING CHECK VALVE-NRV DUCTILE IRON</p>	<p>FIG. KIS16 PN16 'Y' PATTERN STRAINER DUCTILE IRON</p>	<p>FIG. KSSM16 PN16 METERING STATION STAINLESS STEEL</p>
<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN600 TO SUITE BS EN1092-2 FLANGES</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN300 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN600 BS EN1092-2 PN16 Flanged Ends</p>	<p>PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN600 TO SUITE BS EN1092-2 FLANGES</p>

RUBBER FLEXIBLE CONNECTORS

			
FIG. KUC16 PN16 FLEXIBLE CONNECTOR TWIN SPHERE RUBBER (EPDM)	FIG. KUC25LW FLEXIBLE CONNECTOR TWIN SPHERE RUBBER (EPDM)	FIG. KFC16 PN16 FLEXIBLE CONNECTOR SINGLE SPHERE RUBBER (EPDM)	FIG. KFC16CR PN16 FLEXIBLE CONNECTOR SINGLE SPHERE RUBBER (EPDM)
PN Rating: PN16 Temp. Range: 0°C to 120°C Size ½" to 2" BS21 Union Threaded Ends	PN Rating: PN25 Temp. Range: 0°C to 120°C Size ½" to 2" BS21 Union Threaded Ends	PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN600 BS EN1092-2 PN16 Flanged Ends	PN Rating: PN16 Temp. Range: 0°C to 120°C Size DN65 TO DN600 BS EN1092-2 PN16 Flanged Ends

PUBLIC HEALTH RANGE (WRAS / RTM Breda Certified Products)

 	 	 	 
FIG. KBG20 PN20 GATE VALVE BRONZE	FIG. KBG20LS PN20 GATE VALVE BRONZE	FIG. KBL25 PN25 FULL PORT BALL VALVE BRONZE	FIG. KFDRV25 PN25 BRONZE FIXED ORIFICE DOUBLE REGULATING VALVE
Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends	Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends	Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends	Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends
 	 	 	 
FIG. KBG20 PN20 GATE VALVE BRONZE	FIG. KBFV16W PN16 SEMI LUG BUTTERFLY VALVE DUCTILE IRON	FIG. KBL25 PN25 FULL PORT BALL VALVE BRONZE	FIG. KFDRV25 PN25 BRONZE FIXED ORIFICE DOUBLE REGULATING VALVE
Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends	Temp. Range: 0°C to 120°C Size DN65 TO DN200 TO SUITE BS EN1092-2 FLANGES	Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends	Temp. Range: 0°C to 100°C Size ½" to 2" BS21 Threaded Ends



THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

CISO /IRINA has issued an IQNet recognized certificate that the organization:

КИДС ПАЙП АКСЕСЪРИС ЕООД
KIDS PIPE ACCESSORIES LLC

УЛ. ЦЕНТЪЛ КЪРСЪС ПЪРВОЛ 44, ГОРНА ОФИСОВНА Д. 3.110, БУДИНГ 44
 44, БУДИНГ 44, КЪРСЪС ПЪРВОЛ 44, ГОРНА ОФИСОВНА Д. 3.110, БУДИНГ 44
 44, БУДИНГ 44, КЪРСЪС ПЪРВОЛ 44, ГОРНА ОФИСОВНА Д. 3.110, БУДИНГ 44

in the following operational unit:

УЛ. ЦЕНТЪЛ КЪРСЪС ПЪРВОЛ 44, ГОРНА ОФИСОВНА Д. 3.110, БУДИНГ 44
 44, БУДИНГ 44, КЪРСЪС ПЪРВОЛ 44, ГОРНА ОФИСОВНА Д. 3.110, БУДИНГ 44

has implemented and maintains a
Quality Management System
 for the following scope:

DESIGN, MANUFACTURE AND SALE OF VALVES, FITTINGS AND ACCESSORIES FOR WATER SUPPLY SYSTEMS,

which fulfills the requirements of the following standard:

ISO 9001:2015
 Issued on: 2021-06-30
 First Issued on: 2021-06-30
 Expires on: 2024-06-29

The admission is directly linked to the IQNet Partner's capital certification and shall not be used as a stand-alone document.
 CISO/IRINA registration number: 415522105

Registration Number: **IT-129440**





Alex Stambolziev
 President of IQNET

Top. Maria Rangelova
 President of CISO

IQNET is a registered trademark of IQNET Group. CISO is a registered trademark of CISO Group. IQNET and CISO are registered trademarks of IQNET Group. IQNET and CISO are registered trademarks of IQNET Group. IQNET and CISO are registered trademarks of IQNET Group.

ISO 9001:2015 Certificate



This certifies that

KIDS PIPE ACCESSORIES LLC

has had the undermentioned product(s) examined, tested and certified as being of an appropriate quality and standards as required in the Water Supply (Water Fittings) Regulations and Scottish Water Byelaws, subject to scheme requirements being met when installed.

Model Numbers


KFDRV25 manually operated balancing valves

The certificate by itself is no reference of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Approval Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

December 2025

Certificate No.
2012375



Ian Hughes
 WRAS Approval Manager

WRAS Certificate Fig. KFDRV25



This certifies that

KIDS PIPE ACCESSORIES SRL

has had the undermentioned product examined, tested and found, when correctly installed, to comply with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations and Scottish Water Byelaws.

Model Numbers

KBCK20 & KBCK20R RANGES OF NON-RETURN, SWING GATE VALVES (NOT SUFFICIENT FOR BACKFLOW PROTECTION)

The certificate by itself is no reference of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Approval Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

April 2023


Certificate No.
1804088




J. Funnell
 Secretary

Chairman, Product Assessment Group

WRAS Certificate Fig. KBCK20



This certifies that

KIDS PIPE ACCESSORIES LLC

has had the undermentioned product(s) examined, tested and certified as being of an appropriate quality and standards as required in the Water Supply (Water Fittings) Regulations and Scottish Water Byelaws, subject to scheme requirements being met when installed.

Model Numbers


KBG20 RANGE OF GATE VALVES

The certificate by itself is no reference of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Approval Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

October 2025

Certificate No.
2010413



Ian Hughes
 WRAS Approval Manager

WRAS Certificate Fig. KBG20



This certifies that

KIDS PIPE ACCESSORIES LLC

has had the undermentioned product(s) examined, tested and certified as being of an appropriate quality and standards as required in the Water Supply (Water Fittings) Regulations and Scottish Water Byelaws, subject to scheme requirements being met when installed.

Model Numbers

KBL25 SPHERICAL VALVES

The certificate by itself is no reference of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Approval Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

October 2025

Certificate No.
2010098



Ian Hughes
 WRAS Approval Manager

WRAS Certificate Fig. KBL25



This certifies that

KIDS PIPE ACCESSORIES LLC

has had the undermentioned product(s) examined, tested and certified as being of an appropriate quality and standards as required in the Water Supply (Water Fittings) Regulations and Scottish Water Byelaws, subject to scheme requirements being met when installed.

Model Numbers

KBS20 STRAINERS

The certificate by itself is no reference of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Approval Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

October 2025

Certificate No.
2010099



Ian Hughes
 WRAS Approval Manager

WRAS Certificate Fig. KBS20



www.kidsvalves.com

KIDS

#44, Sveti Kniaz Boris I St., 5100 Gorna Oryahovitza - Bulgaria

Tel: +359 618 8 7777

Email: info@kidsvalves.com | Website: www.kidsvalves.com



Every effort has been made to ensure that the information on this brochure is correct. KIDS assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within brochure and reserves the right to change without notice. All text and images are the exclusive property of KIDS and are copyrighted and may not be reproduced, copied, transmitted or manipulated without written permission. KIDS has no direct influence on, or take any responsibility for any working practices employed or depicted in any image(s).