

Notes:

- Designed to BS5163
- Pressure Rating: PN16
- Working Medium: Water, Oil, Steam
- Flanged to BS4504 / BS EN1092-2
- Rising stem available on request
- Other flange standards available upon request
- Other PN pressure ratings available upon request
- ANSI standards available upon request.

Material Specifications

Description	Material
Body	Ductile Iron
Wedge	Ductile Iron + EPDM
Bonnet	Ductile Iron
Stem	Stainless Steel
Handwheel	Ductile Iron

Dimensions

DN	L	H	W	D2	D1	D	f	b	n-ød
65	190	259	180	185	145	120	3	19	4-19
80	203	295	200	200	160	135	3	19	8-19
100	229	327	200	220	180	156	3	19	8-19
125	254	388	250	250	210	186	3	19	8-19
150	267	431	250	285	240	212	3	19	8-23
200	292	527	280	340	295	268	3	20	12-23
250	330	609	315	405	355	318	3	22	12-28
300	356	698	315	460	410	373	3	24.5	12-28
350	381	796	400	520	470	433	3	26.5	16-28

All dimensions are nominal (indicative)
Actual dimensions may vary

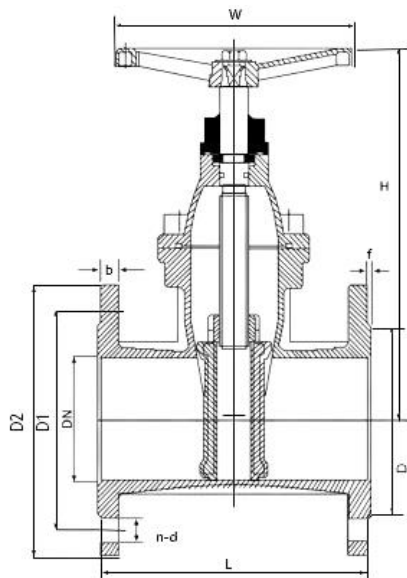


Fig. No. KIRIG16

