

Fig. KIS16

Ductile Iron Y-Strainer

PN16

Notes:

- Pressure Rating: PN16
- Working Medium: Water, Oil, Steam
- Flanged to BS 4504 / BS EN1092-2
- Bolted cover with drain plug
- SS304 Mesh
- Other flange standards available upon request
- Other PN pressure ratings available upon request
- ANSI standards available upon request.
- Mesh details in separate section
- Higher sizes available upon request

Material Specifications

Description	Material
Body	Ductile Iron
Screen	SS304
Cover	Ductile Iron
Drain Plug	Stainless Steel

Dimensions

DN	L	D	K	G	f	B	n-Ød	H
65	290	185	145	122	3	19	4-19	155
80	310	200	160	135	3	19	8-19	172
100	350	220	180	158	3	19	8-19	220
125	400	250	210	186	3	19	8-19	242
150	480	285	240	212	3	19	8-23	289
200	600	340	295	268	3	20	12-23	360
250	730	405	355	320	3	22	12-28	450
300	850	460	410	373	3	24.5	12-28	486
350	980	520	470	433	3	26.5	16-28	590
400	1100	580	525	483	4	28	16-31	670

All dimensions are nominal (indicative)
Actual dimensions may vary

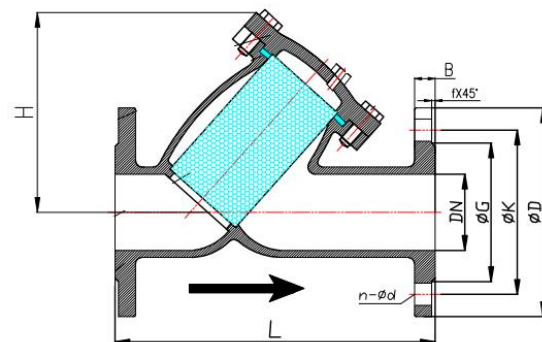


Fig. No. KIS16

